

About Us


We are specialists in Conveyor and Transmission Belting, Industrial Hose, Instrumentation, Sealing and Valves.



FG S2000


Flush Grid S2000

- Designed specifically to work in food and packaging applications.
- It has closed hinges on both sides for durability, a snap-in pin for maintenance, and cleaning.
- It has a 25 % open area allows for airflow, easy cleaning and drying.
- Up to 6" high flights are available for your incline modular belt needs

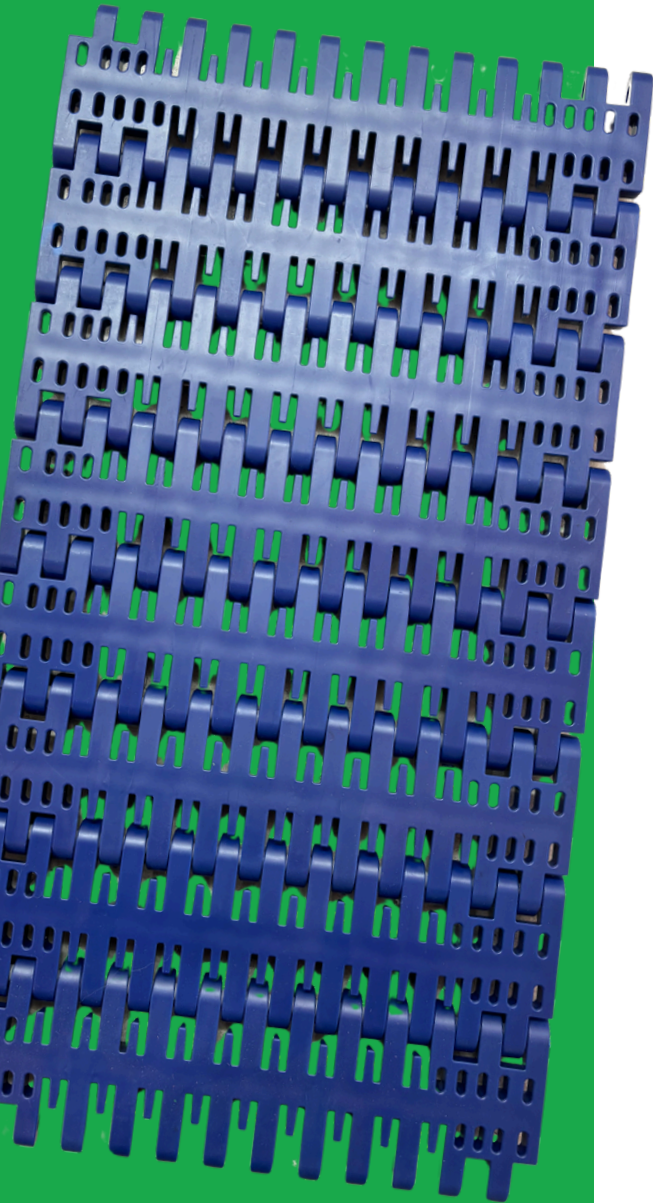

	Inches	Millimeters
Pitch	2.00	50.8
Width increments	0.66	16.7
Thickness	16mm	
	25% Open area	
Max belt pull kg/m ²	+- 1200 kg/m ²	
Pins	6 O snap in pin	
Flights	Up to 6" high	
Standards Colours	Blue	
Material	Polypropylene	

 www.belting.co.za

 011 610 5600